



# SpitzLift Package Description Document

(Product Cut Sheet/ Install Guide)

**PACKAGE DESCRIPTION:** RECEIVER HITCH SPITZLIFT **MAX LOAD CAPACITY:** 700 LBS / 318 KG

**PACKAGE ID #:** PICKUP OPTION 4 **Right side (Curb Side) Install** **PACKAGE ID #:** PICKUP OPTION 4 **Left side (Driver Side) Install**

☐ **VEHICLE SPECIFIC PACKAGE** **VEHICLE MAKE**  **VEHICLE MODEL**  **START YEAR**



PACKAGE IMAGE

## PACKAGE SPECIFICATIONS:

Receiver Hitch SpitzLift

Pickup Option 4

FOR ALL TRUCK MODELS WITH TOW PACKAGES

Designed to be used on Left or Right Side of Truck

Load Capacity: 700 lbs

Includes: Manual Crane LTM-424T and Universal Receiver Hitch Pedestal KTURS-700

## SHIPPING WEIGHTS:

**BOX 1**  **LBS** **BOX 2**  **LBS** **BOX 3**  **LBS** **BOX 4**  **LBS**

## SPECIAL NOTES:


### SPITZLIFT PROPRIETARY DOCUMENT

THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE SOLE PROPERTY OF SPITZLIFT. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SPITZLIFT IS PROHIBITED.

Printed Document is uncontrolled

SL003-PDOCF-REV\_A\_4.10.2019\_ENG

**SPITZLIFT PICKUP TRUCK PACKAGE: RECEIVER HITCH**  
RIGHT SIDE (CURB SIDE) OR LEFT SIDE (DRIVER SIDE) KTURS-700

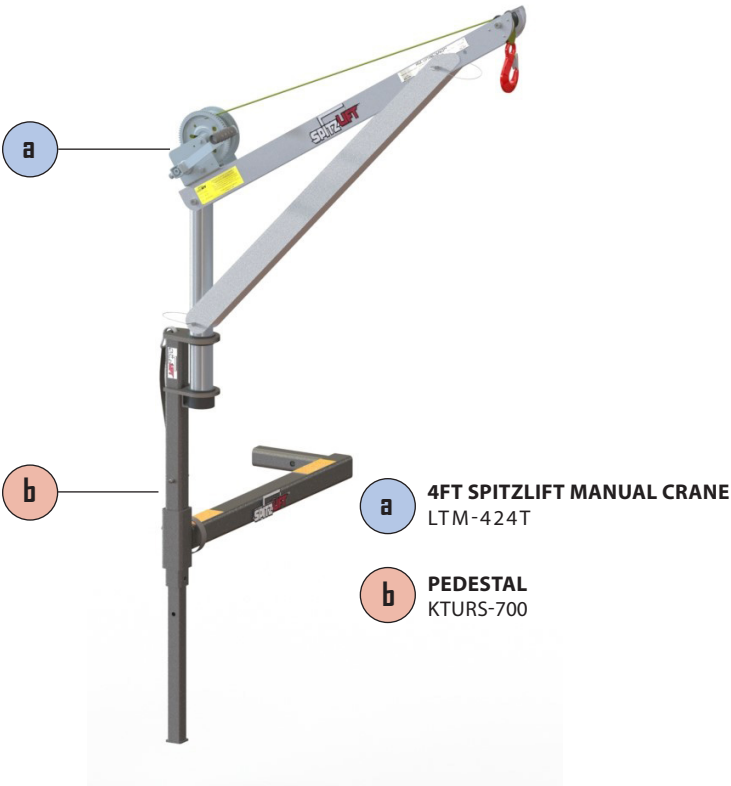

4 FT SPITZLIFT CRANE - MANUAL	SPECIFICATIONS
MAX LIFTING CAPACITY	700 LBS (317.5 KG)
MANUFACTURING STANDARDS	COMPLIANT WITH OSHA AND ASME STANDARDS
ROTATION	360°
WEBBING OR WIRE ROPE	20' (609.6 CM)   50' (1524 CM)
INSTALLED WEIGHT	MANUAL - APPROX. 84 LBS (35.8 KG)
STANDARD FINISH	CLEAR ANODIZED   POWDER COATED
MATERIAL	AIRCRAFT GRADE ALUMINUM & STEEL
WARRANTY	3 YEARS LIMITED







**Receiver Hitch Mount\***

PART#: KTURS-700

\*Receiver Hitch Option includes manual units only.

OD DIMS & BOLT REFERENCE

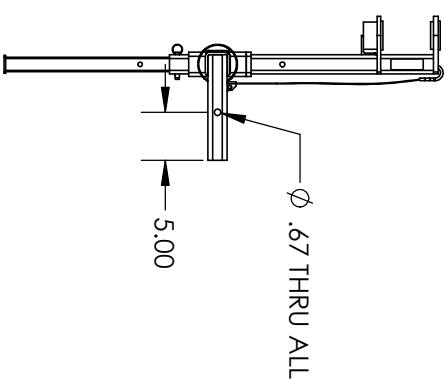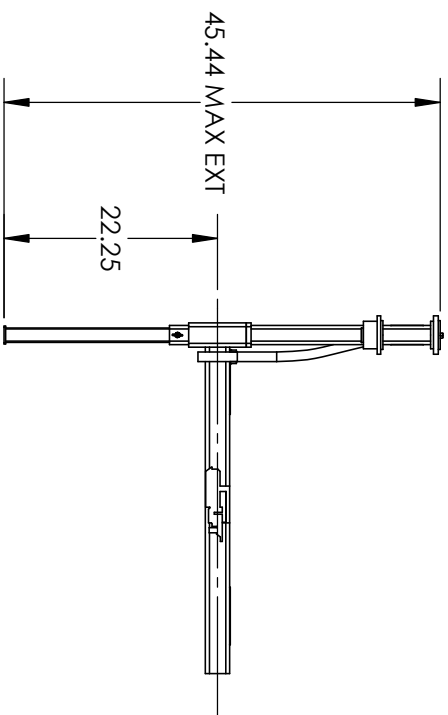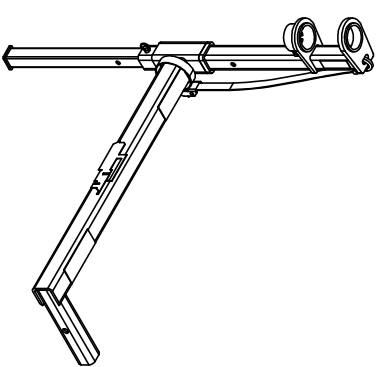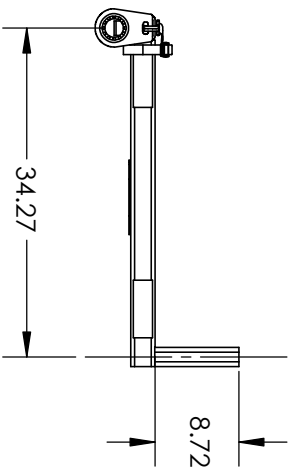

REVISIONS			
ZONE	REV.	DESCRIPTION	DATE
	A	INITIAL RELEASE	10/26/2018

TITLE:

MOUNT KIT, TRUCK RECEIVER 700LBS



MATERIAL DESCRIPTION:

<b>PROPRIETARY AND CONFIDENTIAL</b> THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SPITZLIFT INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SPITZLIFT INC IS PROHIBITED.				
	NAME	DATE	UNLESS OTHERWISE SPECIFIED:	
DRAWN	SM	10/26/2018	DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONS: 1/16 1/4 ANGS: 15 MIN BEND/WEILD ±1/16 ± 1 DEG DECIMAL: ±.005 DECIMAL: ±.01	
CHECKED	MJS	10/26/2018		
ENG. APPR.	MJS	10/26/2018		
SEE NOTES			FINISH	
DO NOT SCALE DRAWING			MATERIAL: Material <not specified>	
PROJECT:		SIZE	DWG. NO.	REV
A		KTURS-700	A	A
SCALE: 1:20		WEIGHT: 57.85	SHEET 1 OF 1	

# SPITZLIFT PICKUP TRUCK PACKAGE - RECEIVER HITCH

RIGHT SIDE (CURB SIDE) | LEFT SIDE (DRIVER SIDE)

MAX CAPACITY 700 / 408 KG



## ASSEMBLY GUIDE

Assembly document reflects curb side install. Can be installed on Driver side.

### STEP 1

INSERT RECEIVER ARM INTO VEHICLE RECEIVER HITCH



### STEP 2

INSERT POST MAST INTO RECEIVER HITCH ARM



### STEP 3

PULL PIN ON POST MAST TO LOWER SUPPORT LEG



### STEP 4

INSERT ASSEMBLED SPITZLIFT CRANE INTO POST MAST

